



REF: OPE-LAB-41NS

# INDOOR OPENINGS REMOTE CONTROL



**THIS SENLAB D™ IS A SMART WIRELESS MODULE, FEATURING THE LORAWAN™ CONNECTIVITY PROTOCOL, EQUIPPED WITH A MAGNETIC DOOR SWITCH SET**

Designed for indoor use, this Senlab offers a small form factor and discreet aesthetics that make it ideal for the home or office.

This Senlab offers the best in class features as:

- Battery Life time
- Rich data content
- Radio performances
- Advanced set of functionalities

### TYPICAL APPLICATIONS

- Opening monitoring
- Activity-based services
- Cold chain management

### TECHNICAL SPECIFICATIONS

Physical specifications	Physical dimensions	50 x 91,5 x 25 mm
	Weight	75 gr
	Operating temperature	0°C to +55°C
RF specifications	RF sensitivity	-137 dBm
	RF power	+14 dBm (25 mW)
	Radio band	868 MHz
EC Conformity: Compliant with Directive 2014/53/UE (RED)	EMC	Final draft EN 301 489-3 v2.1.1   Draft EN 301 489-1 v2.2.0
	Radio	EN 300 220-2 v3.1.1
	Magnetic field exposure	EN 62479
	Safety	IEC 60950-1



15 years \*  
(replaceable battery)



15 km \*




IP30  
(Indoor use)



Local or Public  
Network compliant

**DIMENSIONAL DRAWING**

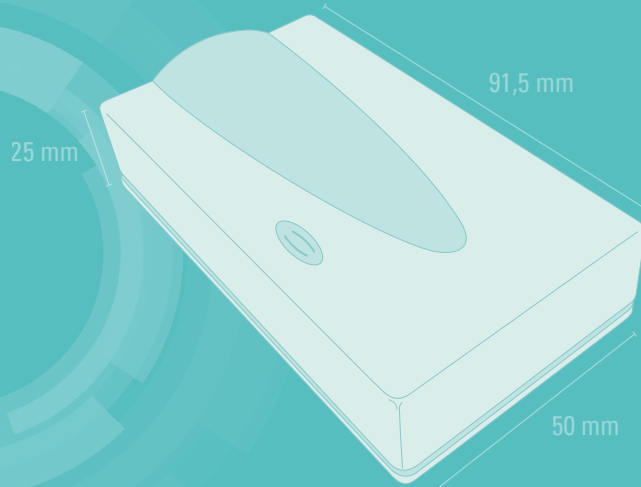

**TECHNICAL FEATURES FOCUS**

**Plug & Play installation**

- Double sided tape or screw mounting of door contacts (provided)
- Door contact detection up to 3 cm
- Activation with magnet (LED feedback)

**High configurability of event detection and transmission**

- Event notification of open and/or close state
- State detection duration configurable
- Immediate transmission or after N events or after maximum duration
- Reconfiguration possible over the air

**Network configuration**

- LoRaWAN parameters (OTAA or ABP activation mode, initial datarate,...)
- Encryption keys customizable by client
- Standard LoRaWAN retries support
- Radio collisions avoidance by pseudo-randomization of transmissions
- Advanced transmission reliability mechanisms (recovery of lost messages...)

**BATTERY LIFE DURATION ESTIMATION**

This following matrix provides the estimated battery lifetime depending on the average Spreading factor used by the Senlab and the transmission period.

Battery life (years)	10mn	15mn	30mn	1h	2h	4h	6h	8h	12h	24h
SF7	13,1	14,2	15,4	16,2	16,6	16,8	16,8	16,9	16,9	16,9
SF8	11,3	12,7	14,5	15,7	16,3	16,6	16,7	16,8	16,9	16,9
SF9	8,7	10,4	12,9	14,7	15,7	16,3	16,5	16,7	16,8	16,9
SF10	6,1	7,8	10,7	13,1	14,8	15,8	16,2	16,4	16,6	16,8
SF11	3,9	5,3	8,1	10,9	13,3	14,9	15,6	15,9	16,2	16,6
SF12	2,4	3,3	5,5	8,4	11,2	13,5	14,5	15,0	15,6	16,3